

## NEW TECHNIQUE FOR IMAGE SEGMENTATION

<sup>1</sup>NARINDER KUMAR & <sup>2</sup>R. P.S.BEDI

<sup>1</sup> Assistant Professor IET, Bhattal, Ropar, India.

<sup>2</sup>, Dean(Distance Education), PTU, Jalandhar, India.

### ABSTRACT

Biogeography is the study of the geographical distribution of biological organisms. BBO is basically an optimization technique it does not involve reproduction or the generation of “children”. This paper proposes a Biogeography Based optimization approach for automatically grouping the pixels of an image into different homogeneous regions. From many years Image segmentation is done with many techniques like PSO, ACO etc. This paper implements BBO approach for image segmentation for partitioning an image into multiple segments.

**KEYWORDS :** Segmentation, region Growing , biogeography, image.

### INTRODUCTION

The goals of this paper are threefold. First, want to give a general presentation of the new optimization method called BBO. Secondly, used BBO approach for image segmentation. Thirdly want to compare and contrast BBO with other population-based optimization methods. We do this by looking at the commonalities and differences from an algorithmic point-of-view, and also by comparing their performances on a set of benchmark functions. Firstly want to give some brief introduction regarding image segmentation, region growing that are need to understand before using BBO.

### IMAGE SEGMENTATION

“Segmentation” refers to the process of dividing a digital image into multiple segments such as a sets of pixels, also known as superpixels (Chad and Hayit, 2002). The main objective of segmentation is to simplify and/or change the representation of an image into meaningful image that is more appropriate and easier to analyze. Segmentation is basically a collection of methods that allowing spatially partitioning close parts of the image as objects.

“Image segmentation” is an important aspect of digital image processing. Image segmentation may be defined as a process of assigning pixels to homogenous and disjoint regions which form a partition of the image that share certain visual characteristics (Fan, Zeng and Hacid, 2005). Image segmentation are used to locate and find objects and boundaries (lines, curves, etc.) in images. It basically aims at dividing an image into subparts based on certain feature. Features could be based on certain boundaries, contour, color, intensity or texture pattern, geometric shape or any other pattern (Pichel, Singh and Rivera,2006). It provides an easier way to analyze and represent an image. The image segmentation process consists in

grouping parts of an image into units that are homogeneous with respect to one or more characteristics as shown in fig 1 (Thomas , and Dresden, 2008). The result of image segmentation is a set of segments that collectively cover the entire image, or a set of contours extracted from the image (Bab Hadiashar and Gheissari, 2006).

Region growing is a simple region-based image segmentation method. It is also classified as a pixel-based image segmentation method since it involves the selection of initial seed points. This approach to segmentation examines neighboring pixels of initial “seed points” and determines whether the pixel neighbors should be added to the region (Yu and Clausi, 2007) .

## **APPLICATION OF IMAGE SEGMENTATION**

Image segmentation is mainly used to locate objects or object boundary, lines etc in an image so it can be used in applications which involve a particular kind of object recognition such as:

- Face Recognition
- Fingerprint Recognition
- Locating objects in satellite images

Since it deals with object detection, so it can also be used in applications involving object tracking such as traffic surveillance etc(Lynch and Ghita,2008) . Some of the practical applications of image segmentation are (Fritz, Rinck and Unterhinninghofen, 2005):

- Medical imaging
  - Locate tumors and other pathologies
  - Measure tissue volumes
  - Computer-guided surgery
  - Diagnosis
  - Treatment planning
  - Study of anatomical structure
- Traffic control systems
- Brake light detection
- Machine vision
- Agricultural imaging – crop disease detection

## **BIOGEOGRAPHY-BASED OPTIMIZATION**

Biogeography-Based Optimization is a type of evolutionary algorithm. As its name implies, BBO is based on the mathematical study of biogeography. Biogeography is the study of the distribution of animals and plants over time and space. Its aim is to elucidate the reason of the changing distribution of all species in different environments over time (Haiping Suhong and Man, 2009) .

BBO is an evolutionary process that achieves information sharing by species migration. It is modeled after the immigration and emigration of species between habitats to achieve information

sharing. BBO operates by migrating information between individuals, thus resulting in a modification of existing individuals. Individuals do not die at the end of a generation. One characteristic of BBO is that the original population is not discarded after each generation. It is rather modified by migration (Simon, 2008).

BBO is a population-based optimization algorithm it does not involve reproduction or the generation of “children.” Mathematical equations that govern the distribution of organisms were first discovered and developed during the 1960s. Mathematical models of biogeography describe how species migrate from one island (habitat where they live) to another, how new species arise, and how species become extinct. Biogeography basically based on two criteria-HIS and LSI. Geographical areas that are well suited and more compatible as residences for biological species are said to have a highly suitability index (HSI). Features that correlate with HSI include such factors as rainfall, diversity of vegetation, diversity of topographic features, land, area, and temperature (Simon,2008). The variables that characterize habitability are called suitability index variables (SIVs). Habitats with a HSI tend to have a large number of species, while those with a low HSI have a small number of species. Habitats with a HSI have a low species immigration rate because they are already nearly saturated with species. HIS are more static than LSI. LSI have a high species immigration rate because of their sparse populations. LSI habitats are more dynamic in their species distribution than HSI habitats.

## MIGRATION

The BBO migration strategy in which many parents can contribute to a single offspring, but it differs in at least one important aspect. BBO migration is used to change existing habitat. Migration in BBO is an adaptive process; it is used to modify existing islands. Migration stage arises when LSI occurs. when species are less compatible with their habitat then they migrate (Simon,2008).

## MUTATION

The implemented mutation mechanism is problem dependent. In which a new region are created by hybrid others region.

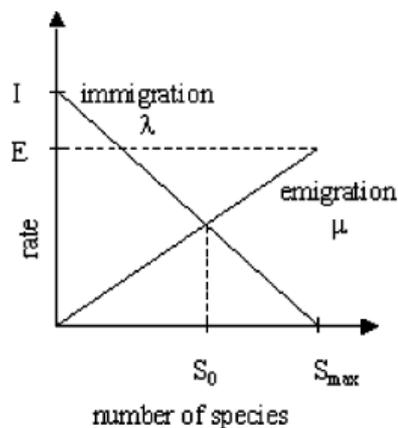


Fig. 1 Species Model

## PRESENT WORK

There are many clustering algorithms widely used to solve the segmentation problem (e.g., K-means, FCM, ISODATA and Snob). Here we use new biogeography technique for image segmentation (Taiwi, 2004). BBO is a population-based optimization algorithm it does not involve reproduction or the generation of “children.” As we started we select a seed using some set of predefined criteria. After selecting examine neighbor pixels of seed points and calculate MSE color distance between pixels (Auger and Hansen, 2005). If we use RGB image, then we calculate MSE color distance. If we use LAB color space then we calculate CMC color distance between neighboring pixels (Haisong and Hirohisa, 2005). According to the BBO approach make three islands HIS, MSI and LSI. HSI (highly suitability index) that contain pixels which have more similar properties. Medium suitability index (MSI) basically contains pixels which have medially suitable. Low suitability index (LSI) that contain pixels which contain pixels that not so familiar. HSI tend to have a large number of species, while those LSI have a small number of species. HSI have many species that emigrate to nearby habitats, simply by virtue of the large number of species that they host. HSI have a low species immigration rate because they are already nearly saturated with species. Therefore, HSI habitats are more static in their species distribution than LSI habitats. LSI have a high species immigration rate because of their sparse populations. Then we select threshold value (Fritz, Rinck and Dillmann, 2006). If our calculated distance less than threshold then its migrate to other region, otherwise its make its own region.

The Image Segmentation using BBO algorithm can be informally described with the following algorithm.

**Step 1)** Take an image and convert it into Lab image.

**Step 2)** Calculate CMC distance between neighboring pixels.

**Step 3)** Initialize the BBO parameters. Allocate the maximum species count  $S_{max}$  and the maximum migration rates  $E$  and  $I$ , the maximum mutation rate  $m_{max}$ . The maximum species count and the maximum migration rates are relative quantities.

**Step 4)** Initialize a random set of habitats, each habitat corresponding to a potential solution to the given problem. For each habitat, map the HSI to the number of species  $S$ , the immigration rate,  $\lambda$  and mutation  $\mu$ . Compute  $S, \lambda, \mu$ , for each solution.

$$\lambda_k = E(1 - k/n)$$


where  $k$  = species count,  $n = S_{max}$

**Step 5)** Modify habitats (migration) based on  $\lambda, \mu$  based on probability.

**Step 6)** Go to step (3) for the next iteration. This loop can be terminated after a predefined number of generations, or after an acceptable problem solution has been found.


**RESULTS**

After implement ting BBO approach for image segmentation. Following are the results that we got. Firstly we take RCB image, then convert it into Lab image as shown below:-

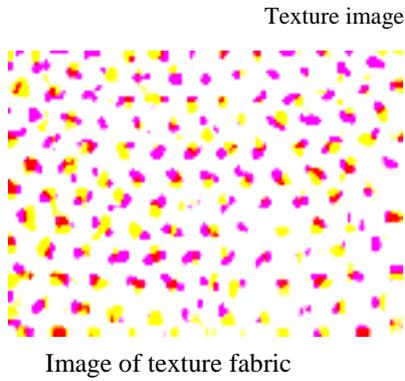


**Fig. 3 : Lab Image**

Then we segmented the objects in image and make different clusters. The first cluster that contains the objects of similar characteristics as shown below with their histogram:-

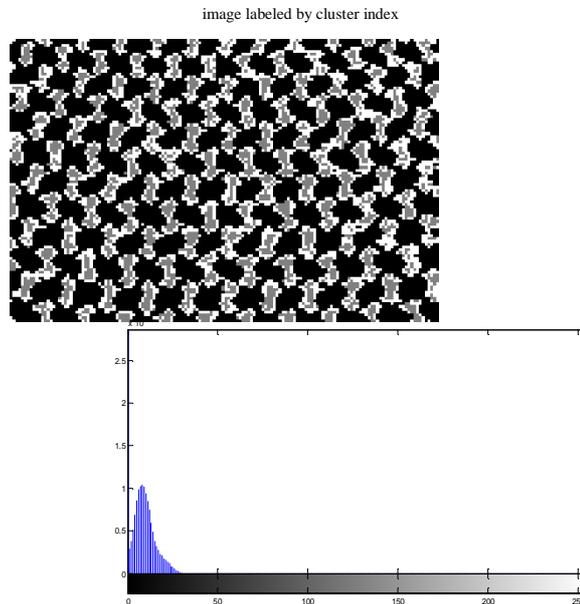


**Fig. 4 : Histogram for cluster1**

Second cluster with contain different object that have perform same predefined criteria as shown below with its histogram.

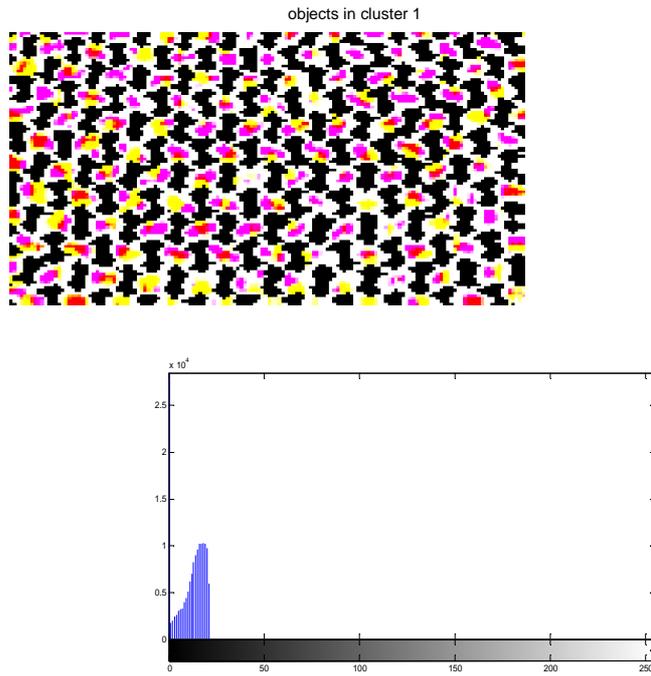


**Fig 5 : Histogram for cluster 2**

Third cluster of objects are shown below with its histogram.

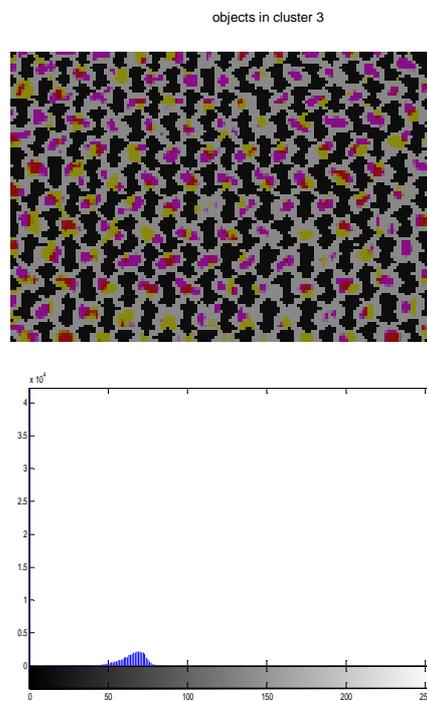

**Fig. 6 Histogram For cluster 3**

Fourth Cluster shows all segmented objects that satisfy all predefined criteria.

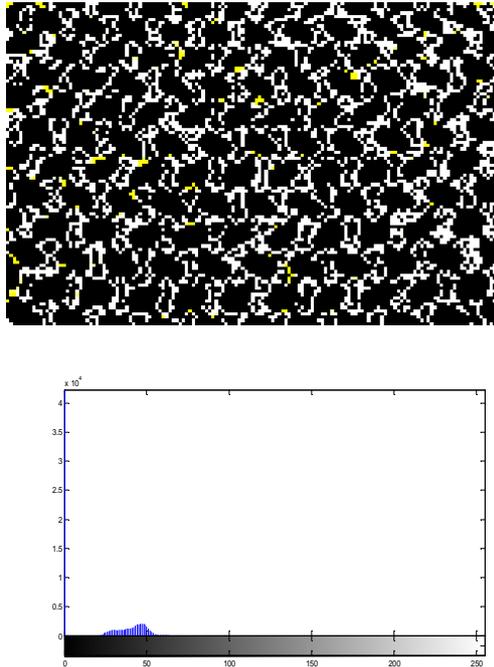

**Fig. 7 : Histogram for cluster 4**

## CONCLUSIONS

Segmentation is a collection of methods allowing interpreting spatially close parts of the image as objects. From many decade, image segmentation doing with many techniques like PSO, GA, clustering techniques. As we concluded, BBO is uniquely a biology technique that we used for image segmentation. BBO using image segmentation provide more accurate segmented image as compared to other evolutionary algorithm. BBO is a population-based optimization algorithm it does not involve reproduction or the generation of “children”.

## REFERENCES

1. Chad, Carson., Hayit, Greenspan., “Blobworld: Image Segmentation Using Expectation-Maximization and Its Application to Image Querying”, IEEE Transactions on Pattern Analysis and Machine Intelligence, Vol. 24, No. 8, August 2002.
2. Fan, J., Zeng, G., Body, M., Hacid, M.: “Seeded region growing: and extensive and comparative study”, Pattern Recognition, Vol. 26. Elsevier, Amsterdam 2005.
3. Pichel, J.C., Singh D.E., Rivera, F.F., “Image segmentation based on merging suboptimal segmentations’, Pattern Recognition Letters, Vol. 27. Elsevier, Amsterdam 2006.
4. Bab Hadiashar, A. and N. Gheissari,, “Range image segmentation using surface selection criterion”, IEEE Transactions on Image Processing, 2006.

5. Lynch.Michael., Ghita.Ovidiu., and Paul F. Whelan., “ Segmentation of the Left Ventricle of the Heart in 3-D+t MRI Data Using an Optimized Nonrigid Temporal Model”, IEEE Transactions On Medical Imaging, Vol. 27, No. 2, February 2008.
6. Fritz, D., Rinck, D., Unterhinninghofen,R., Dillmann, R., and Scheuring M., “Automatic segmentation of the left ventricle and computation of diagnostic parameters using regiongrowing and a statistical model,” in *Proc. of SPIE Medical Imaging*, pp. 1844–1854,2005.
7. Haiping, Ma., Suhong Ni, and Man Sun, “Equilibrium Species Counts and Migration Model Tradeoffs for Biogeography-Based Optimization”,Joint 48th IEEE Conference on Decision and Control and 28th Chinese Control Conference Shanghai, P.R. China, December 16-18, 2009.
8. Simon, D., “Biogeography-Based Optimization,” IEEE Transactions on Evolutionary Computation, Vol. 12, No. 6, pp. 702 – 713, December 2008.
9. Taiwi. Taiwan, “Intemationai Conference on Networking, Sensing Control Particle Swarm Optimization Algorithm and Its Application to Clustering Analysis”, 2004.
10. Zheng, Y.-L., Ma, L.-H., Zhang, L.-Y., & Qian, J.-X., “On the convergence analysis and parameter selection in particle swarm optimization”, on *Proceedings of the IEEE international conference on machine learning and cybernetics*,pp. 1802–1807,2003.
11. Auger, A., and Hansen, N., “Performance evaluation of an advanced local search evolutionary algorithm”, In *Proceedings of the IEEE Congress on Evolutionary Computation*, 2005.
12. Haisong ,X., and Hirohisa Y. , “Visual evaluation at scale of threshold to suprathreshold color difference,” *Color Research and Application*, vol. 30, no. 3, pp. 198–208, 2005.
13. Fritz, D., Rinck, R., Dillmann., “Segmentation of the left and right cardiac ventricle using a combined bi-temporal statistical model,” in *Proc. of SPIE Medical Imaging*, pp. 605–614,2006
14. Nikolaus Hansen, Raymond Ros, Nikolas Mauny, Marc Schoenauer, and Anne Auger. “PSO facing non-separable and ill-conditioned problems”. Research Report RR-6447, INRIA, 2008.
15. Hansen, N.,“The CMA evolution strategy: a comparing review” pages 75–102. Springer, 2006.
16. Pakhira, M. K., Bandyopadhyay, S., and Maulik, U., “A Study of Some Fuzzy Cluster Validity Indices, Genetic clustering And Application to Pixel Classification, Fuzzy Sets and Systems”,2005,pp:- 191–214.
17. W.-T. Wang, S.-X. Gong, Y.-J. Zhang, F.-T. Zha, and J. Ling, “Low RCS Dipole array synthesis based on Mom-Pso Hybrid Algorithm”, *Progress In Electromagnetics Research, PIER 94, 119-132, 2009.*
18. Qiyao Yu and David A. Clausi., Senior Member, “IRGS: Image Segmentation Using Edge Penalties and Region Growing”, IEEE Transactions on Pattern Analysis and Machine Intelligence, Vol. 30, No. 12, December 2008.